



Pneumatic

Autoswing
on Rotex Pro
only



- Standard 40x50 cm plate
- Optimal heat & pressure distribution
- Robust frame

User friendly :

- * Complete lateral clearance of the plate
- * Pneumatic closing & opening
- * Automatic rotation at the end of the cycle (Pro)

- Suitable for laser transfer applications & pretreatment drying
- Ideal for medium production
- Manufactured in France

- 2-year guarantee on the machine
- 10-year guarantee on heating plate



Set programs



*QuickRelease®
system*



*GPX 3200W
(PRO version)*




Pre-heat time


OPTIONAL ACCESSORIES



Support table




DTG plate



Set of 4 plates




Laser pointer



Teflon Sheet



Nomex® cover



Shoe plate



Compressor

Email

sales@sefa.fr
support@sefa.fr
www.sefa.fr

Phone

Office : + 33 4 68 74 05 89
Fax : + 33 4 68 74 24 08


Address

SEFA SAS
Z.I. PASTABRAC
11 260 ESPERAZA (FR)

TECHNICAL CHARACTERISTICS

Type	Pneumatic
Operation	Swing - Rotating plate
Platen size	40x50 cm / 16x20"
Max thickness	17 mm
Weight	81 Kg / 179 lbs
Pressure	400 gr/cm ²
°C / °F Max	220 °C / 429 °F
Power	2500 W (Rotex Air Lite) 3200 W (Rotex Air Pro)
Power supply	240 V Single-phase
Amperage	11 A (Rotex Air Lite) 14 A (Rotex Air Pro)
Applications	ChromaLuxe, Flex, Direct to Garment, Pretreatment, Sublimation Rigid Substrate, Textile Sublimation, Screen Printing, Laser Transfer
Dimensions	621x847x572 mm

SETTINGS

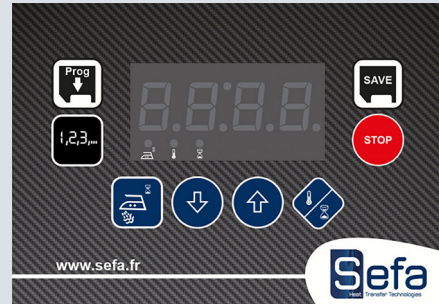


Electronics developed by Sefa

Accurate and fast regulation (PID control) for a wide range of heat transfer products : Flex, flock, sublimation, screen printing transfer.
 Double timer (main + pre-heat)
 2 cycle counters
 3 settable programs
 Stop cycle function
 From 0 to 570 sec (precision +/- 1%).
 From 0 to 220°C (precision +/- 1%).
 Heating time to reach 180°C : 15 min.


OPTIONAL ACCESSORIES



TAB-98 LITE
Support table




PLA-DRY M
Sponge plate to dry pretreated clothes.




PLA-SET
Set of 4 plates
12 x 8 cm, 15 x 15 cm,
12 x 45 cm, 25 x 30 cm.



CROI-161
Laser system to place your transfers with more precision (1 extra laser can be added).



PLA-SHOES-CV
Special plate that fits textile and sport shoes (side and back).



HOU-50
Heat resistant Nomex® cover for easier threading and protection.



COMP-74
Silent compressor 42dB
24L - 74Lt/min.



180° reversible
C-shaped lower part with Quick Release system

DIMENSIONS



Box weight CAI-100 : 25 kg